
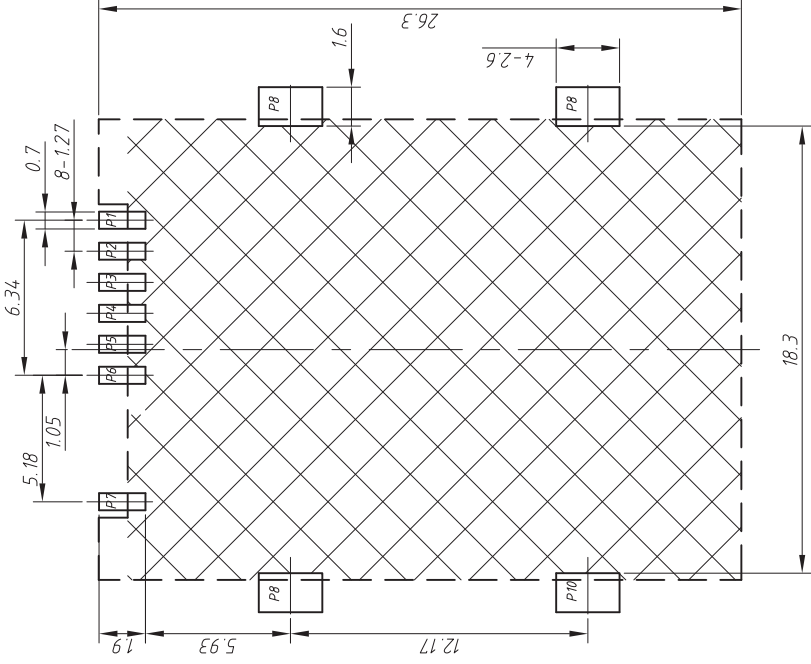


**Specification**


- x Electrical Characteristics :
- Current Rating:0.5A.
- Withstanding Voltage:AC500V r.m.s.
- Insulation Resistance:1000Megohms Minimum at DC 500V.
- Contact Resistance:100Miliohms Maximum.

- x Mechanical Characteristics:
  - Mating Cycles: 10000 Insertions.
  - x Environmental :
  - Operating Temperature:-40°C to +85°C.
- Material:
- 1.Housing:HI- Temp plastic UL 94V-0 Rated.
  - 2.Contact:Copper Alloy.
  - 3.Shell:Copper Alloy.

Can accord with management standards for "environment-related substances to be controlled"

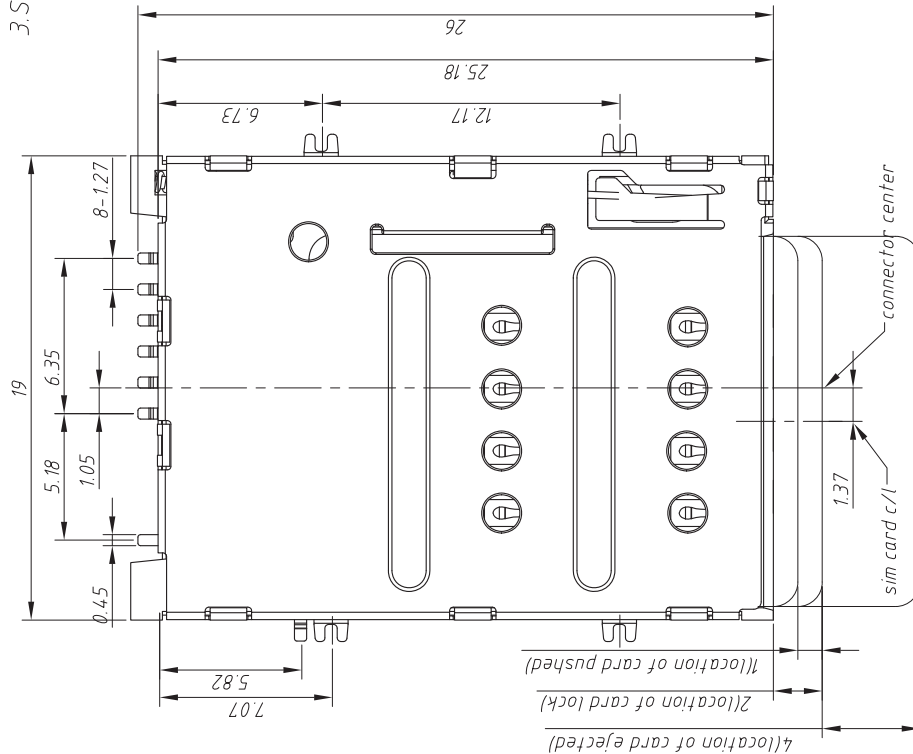

Connector Terminal NO.	Pin NO.
Pin 1	VCC
Pin 2	GND
Pin 3	RST
Pin 4	VPP
Pin 5	CLK
Pin 6	I/O
Pin 7	CD-CARD Detect Switch
Pin 8	GND

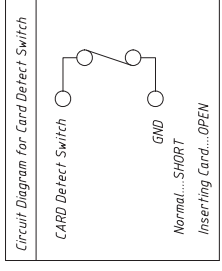

RECOMMENDER PCB LAYOUT TOLERANCE UNLESS OTHERWISE IS ±0.05



**Wellco T&C Co., Ltd.**

图号	PIN # S613
名称	SIM card 6pin top push 1.3
页码	1/1
版本	A0
图	产品图

单位	11.07.07
日期	Kaissong
制图	
审核	
核准	
比例	1:1