
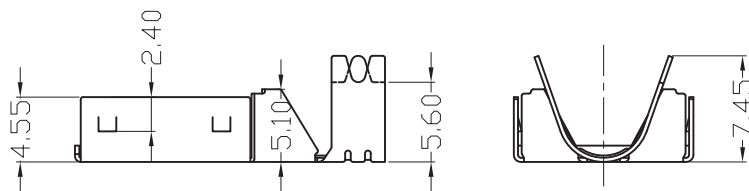
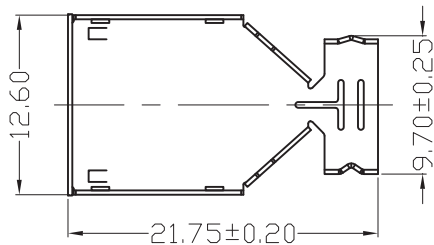
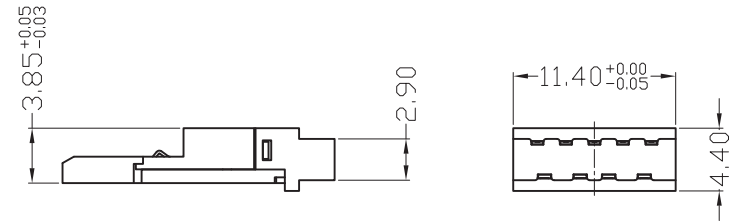
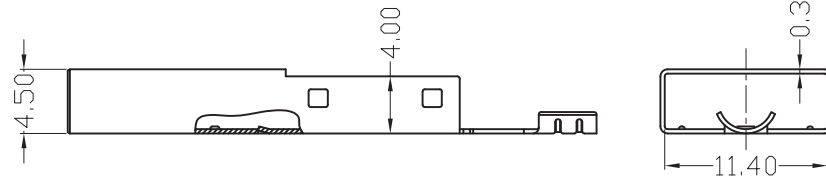
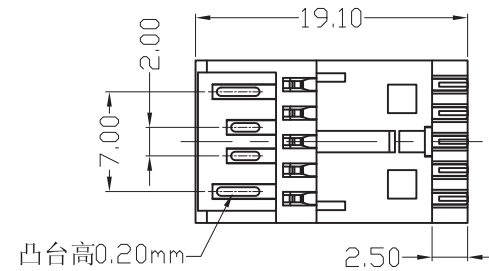


REV.	DESCRIPTION	DATE	DEVISER	APPROVED
A/0	The last word	2009.09.18	Andy Lee	

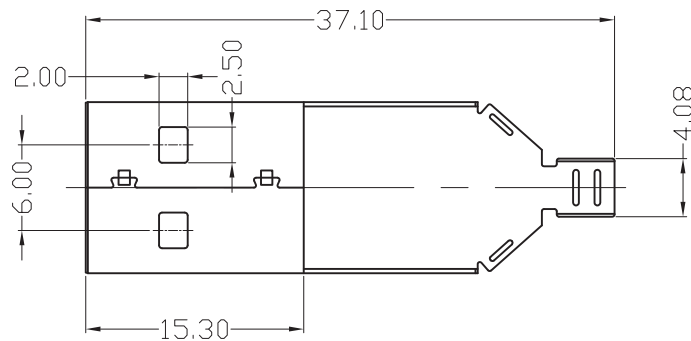

NOTE:

- Contact Resistance: 20milliohms Max;
- Insulation Resistance: 1,000 Megohms Min;
- Dielectric Withstanding Voltage: 500V AC Min for 1 minute;
- Operation Temperature: -20°C to +85°C.

ORDERING INFORMATION

UA09PSXXZZYY

- 塑胶颜色
- 外壳电镀规格
- PIN针电镀规格

TOLERANCES GENERAL:	
. X	± 0.20
. XX	± 0.10
. XXX	± 0.05
ANGLE	
. X	± 2.0°
. XX	± 1.0°

Wellco T&C Co., Ltd. www.wellco.com.tw

UNIT:	mm	DRAWN:	Andy Lee	TITLE: USB-A 9Pin Plug Solder (3.0 Version)		
3RD:		CHECKED:		Pin针带凸台		
SCALE:	FIT	APPRD:		SHEET:	1	PART NO: UA09PSXX0104-1
REV:	A/0	EXAMINE:		CHART NO: 9091801	MATE NO:	