



USBAM/MINI USB 5PIN M, OD: 4. 0MM
L=1000MM BLACK.

NO.	DRW	DATE	REV	NOTE
1	ZhouYi Juan	2009/04/03	A/A	Initial Drawing
2				

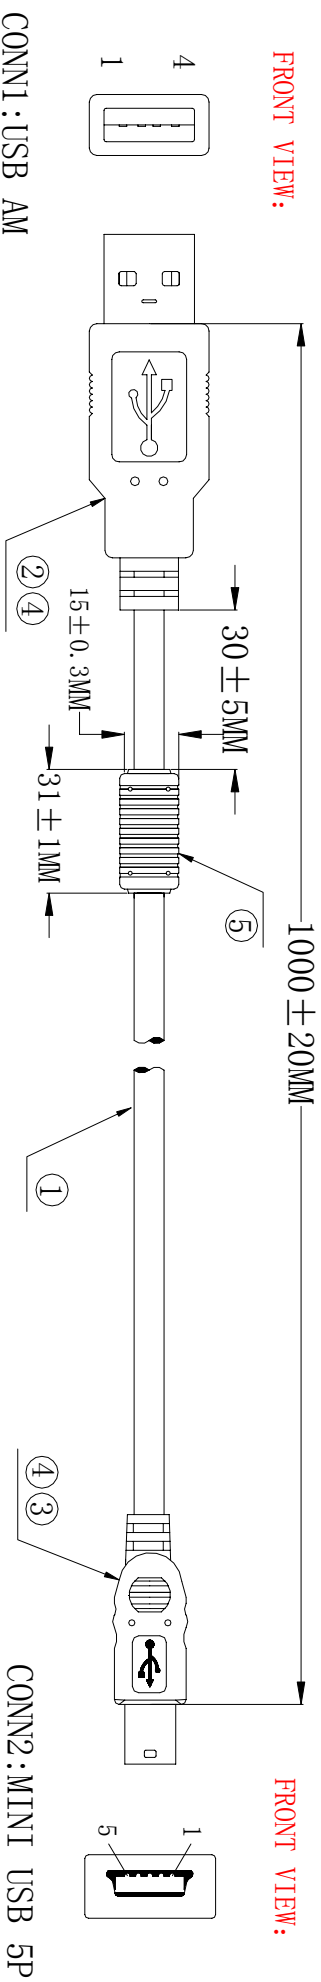

1. WIRING:
- | | |
|---------|---------|
| CONN1 | CONN2 |
| 1 ----- | 1 RED |
| 2 ----- | 2 WHITE |
| 3 ----- | 3 GREEN |
| 4 ----- | 5 BLACK |
| G ----- | G DRAIN |

2. PACKING:

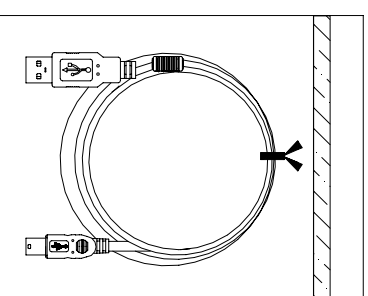

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
1	CABLE	UL2725, 28AWG*1P+28AWG*2C+AEB OD=4. 0MM BLACK, L=1000MM	1	PC
2	CONNECTER	USB AM , WHITE INSULATION , SHELL NICKEL PLATED WITH SOLDER.	1	PC
3	CONNECTER	MINI 5P MALE, SHELL NICKEL PLATED WITH SOLDER.	1	PC
4	PVC	45P PVC , COLOR:BLACK	1	10g
5	FERRITES	PVC MOLDED BLACK.	1	PC

Wellco T&C Co., Ltd.

CUST OMER	DATE	PAGE	1/1
DRW ZhouYi Juan	PRODUCT USB AM/MINI USB 5PIN	REV	A
CHECK	SCAL	UNIT	mm
APP	DATE	2009/04/03	Draw NO.