

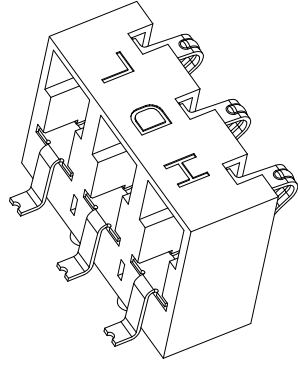
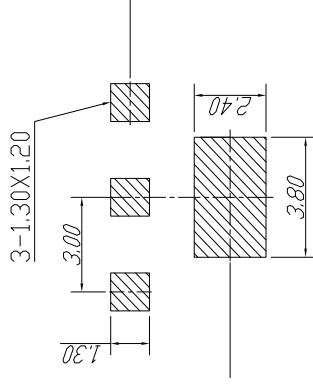



MAK.	QUA.	Description	REV.	DRW.	黄
△					
△					

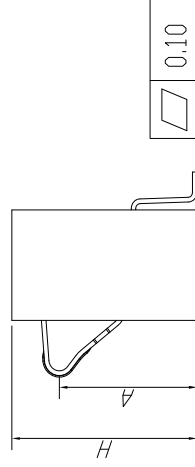

3D VIEW

序	H	A	料号
1	4.60	3.01	BAT00004630X
2	5.00	3.41	BAT00005030X
3	5.40	3.81	BAT00005430X
4	6.00	4.51	BAT00006030X
5	6.20	4.72	BAT00006230X
6	6.40	4.81	BAT00006430X
7	6.80	5.21	BAT00006830X



备注:

1. 材质:
 - 1.1 胶芯: LCP UL94V-0
 - 1.2 端子: 太铜, 镍底50um, 全金1um
2. 主要特征:
 - 2.1 额定电流: 0.5A
 - 2.2 接触阻抗: 50mΩ max
 - 2.3 绝缘阻抗: 100MΩ MIN 100V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度235±5℃, 时间5±0.5s
 - 2.6 使用寿命: 3000次
 - 2.7 工作环境: 温度: -30℃--+80℃; 湿度: 80% MAX

P.C.B LAYOUT__TOP VIEW



Wellco T&C Co., Ltd.

Gen.Tolerance	Scale	Not
.X ± 0.20	Unit	mm
.XX ± 0.08	Size	∠±1°
.XXX ± 0.05		

P/N # BAT0000xx30-NP
Battery connector

This spec drawing is under the property of Wellco T&C Co., Ltd.

Rev. A	DRW by Amy July 23 2008
Page 1-1	CHK by Long July 24 2008
	APP by Chin July 24 2008