

NOTES:

1.MATERIAL


- 1-1.HOUSING: THERMOPLASTIC,UL 94V-0,COLOR:BLACK
- 1-2.CONTACT:COPPER ALLOY T=0.20mm
- 1-3.NAIL:STAINLESS STEEL T=0.15mm

2.FINISH

- 2-1.CONTACT: 3u" Au PLATING ON CONTACT AREA
100u" Min Matter-Sn PLATING ON SOLDERTAILS
- 2-2.NAIL:50u" Min. NICKEL UNDERPLATING OVER ALL
50u" Min. NICKEL UNDERPLATING
100u" Min. Matter-Sn OVERALL

3.PRODUCT SPECIFICATIONS:

- 3-1.VOLTAGE RATING:250V
- 3-2.CURRENT RATING:2.0A
- 3-3.INSULATION RESISTANCE:1000MEG OHM MIN
- 3-4.OPERATION TEMPERATURE:-55 TO +125
- 3-5.DURABILITY:3000 CYCLES, AFTER TEST THE NORMAL FORCE ATTENUATION CANNOT EXCEED 15%
- 3-6.NORMAL FORCE:60gf Min. AT THE WORKING POSITION

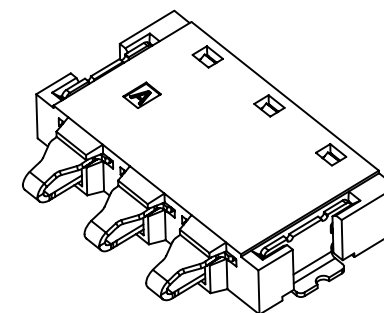

| | | |
|---------------|-------|-----|
| Gen.Tolerance | Scale | Not |
| .X ± 0.20 | Unit | mm |
| .XX ± 0.08 | Size | |
| .XXX ± 0.05 | | |
| ∠±1° | | |

| | | |
|----------|--------|-------------------|
| Rev. A | DRW by | Amy July 07 2011 |
| Page 1-1 | CHK by | Long July 11 2011 |
| | APP by | Chin July 11 2011 |