



# DVI18+1 M/DVI18+1 M L=2000MM BLACK

NO.	DRW	DATE	REV	NOTE
1	ZhouYiJuan	2008/11/05	A	

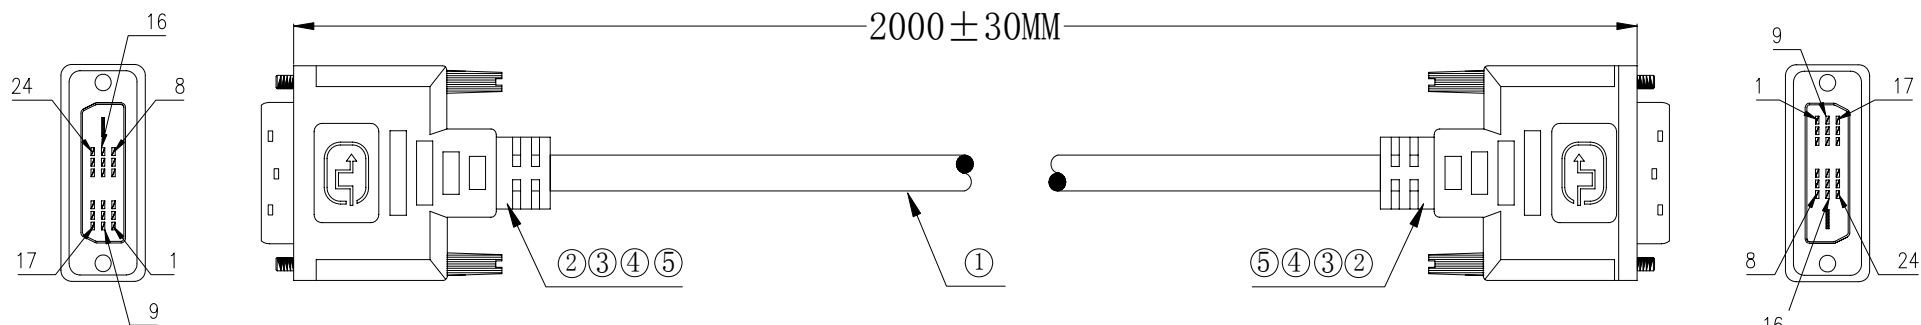


P1:DVI 18+1 M

## 1. Wiring:

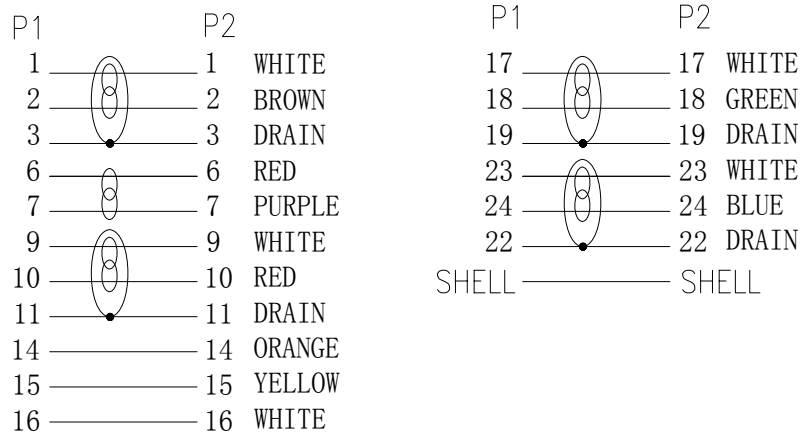

P2:DVI 18+1 M

## 2. Packing:



NO.	ITEM.	DESCRIPTION	Q' TY	UNIT
1	CABLE	UL20276 [(28AWG*1P+AEB)*4+28AWG*1P+28AWG*3C]*AEB, BLACK OD:7.3MM L=2000MM.	1	PC
2	CONNECTOR	DVI18+1 MALE (PIN 3U") , BLACK INSULATION SHELL NICKEL PLATED WITH SOLDER.	2	PC
3	THUMBSCREW	MOLDED HUMBSCREW, #4-40UNC GOLD FLASH, Ø2.8*45.5MM,	4	PC
4	INTER MOLD	PE MATERIAL.	25	g
5	OUTER MOLD	45P PVC , COLOR:BLACK.	80	g

Wellco T&C Co., Ltd.									
CUSTOMER	WXM	DATE		PAGE	1/1				
DRW	ZhouYiJuan	PRODUCT	DVI18+1 M/DVI18+1 M	RATIO	1:1				
CHECK		SCAL	QXH2008-0563	REV	A	UNIT	mm		
APP		DATE	2008/11/05	Draw NO.	QXH-WXM-0656				