



模治具名称	Customer NO.	Revised Description	Rev NO.	Date
模治具编号				

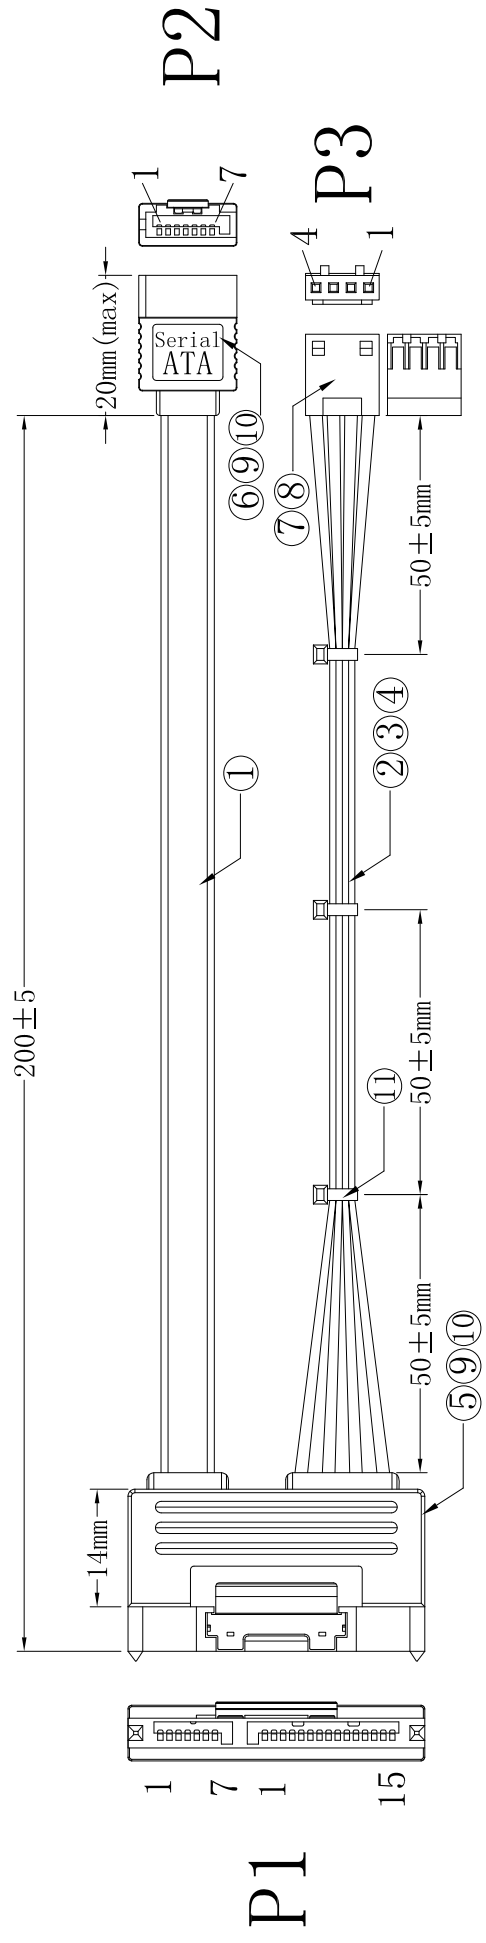

接点图

P1	P2	P3	颜色
1	1		
2	2		
3	3		
4	4		
5	5		
6	6		
7	7		
1+2+3			
4+5+6		3	黑色
7+8+9		4	红色
10+11+12		2	黑色
13+14+15		1	黄色

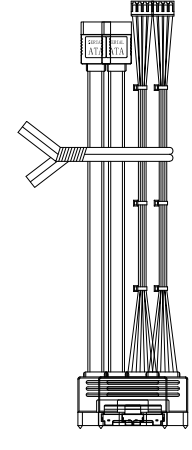

每5pcs一扎; 25pcs一袋;

备注:

1. 成品100%做导通测试;
2. 绝缘阻抗: 10M Ohms DC 300V;
3. 导通阻抗: 2 Ohms DC 300V;
4. 产品符合欧盟ROHS环保标准;

ITEM	DESCRIPTION	SUPPLIER P/N	QTY	REMARK
11	白色束线带 2.5*100mm	YQ-SXW100	3pcs	
10	PVC外模料 35P 黑色	YQ-YE0100003002	10g	
9	PE内模料 (透明)	YQ-YD1100000002	5g	
8	HRS DF1B-4S-2.5R 白色HSG或仿品	HRS DF1B-4S-2.5R	1pcs	
7	HRS DF1B-2022SCF 端子或仿品	DF1B-2022SCF	4pcs	
6	SATA 7P 带弹片插头 (15U)	SATA-C07F-B110A5-W10	1pcs	
5	SATA 22P 带弹片插头 (15U)	SATA-C22F-28C5A5-000	1pcs	
4	UL 1007-20AWG 黄色电子线	YQ-YB0510072009	200mm	
3	UL 1007-20AWG 红色电子线	YQ-YB0310072009	200mm	
2	UL 1007-20AWG 黑色电子线	YQ-YB0110072009	200mm*2	
1	UL21149 (26AWG/2C+A+28/2D)*2F+Jacket 00:2.2*7.8mm PVC Jacket:Red		195mm	膜皮4mm/ 胶芯线2.5mm

REV.	A0	REV.	潘燕利	2012/09/11
PRT. NO.	A120063-0	SA	SATA 22P带弹片 TO	
DWG. NO.		SH	SATA 7P带弹片+PH2.5	
		1 of 1	HSG 4P	
SCALE	I: 1	DRW. BY	潘燕利	
GEN. TOLERANCE	.X ± 0.30	CHK. BY		
	.XX ± 0.20	APP. BY		
	.XXX ± 0.10			
SIZE	∠ ± 1°			

Wellco T&C Co., Ltd.