


Rohs Compliant


REV.	DESCRIPTION	DATE	CHANGER
A/0	INITIAL RELEASE	2020-01-02	Yongtong

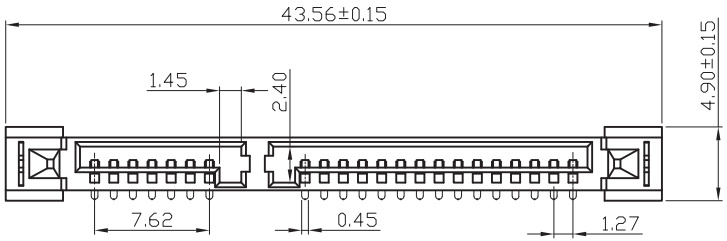

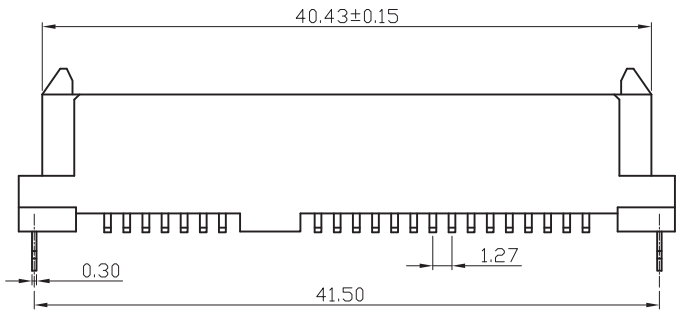

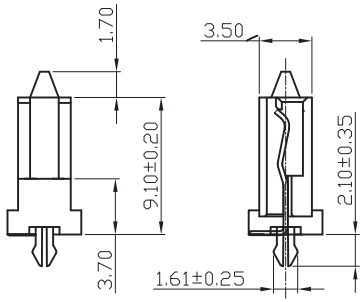

SECTION A-A

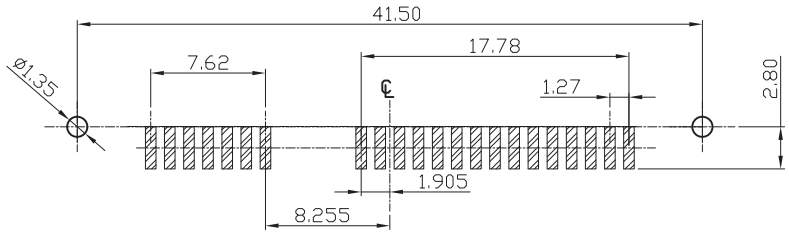

RECOMMENDED PCB LAYOUT(T=1.60mm)
PCB TOLERANCE:±0.05

SPECIFICATION:
1. MATERIAL:
HOUSING: LCP, UL94V-0
COLOR:BLACK
CONTACT:PHOSPHOR BRONZE C5191R H, T=0.25mm
PEG:BRASS C2680R H, T=0.30mm
2. FINISH:
CONTACT:GOLD/TIN PLATING ON CONTACT AREA
100u″MIN. TIN-LEAD PLATING ON SOLDERTAILS
50u″ MIN. NICKEL UNDERPLATING OVER ALL
PEG:100u″ MIN. TIN-LEAD PLATING ON SOLDERTAILS
50u″ MIN. NICKEL UNDERPLATING OVER ALL

Wellco T&C Co., Ltd.

LINEAR	X.	±0.50	PART NAME: SATA 7+15P Female H9.0mm Vertical Type Positive SMT			
	X.X	±0.35				
	X.XX	±0.25				
	X.XXX	±0.05	PART NO	SF90-220T0SM6102	DRAWED	Yongtong
ANGULAR	X°	±3°	DRAW NO	DN-SF90-003	CHECKED	WangLing
	X.X°	±1°				
UNIT: mm [inch]			SCALE:1:1	SIZE: A4	SHEET:1 OF 1	APPROVED Alun