

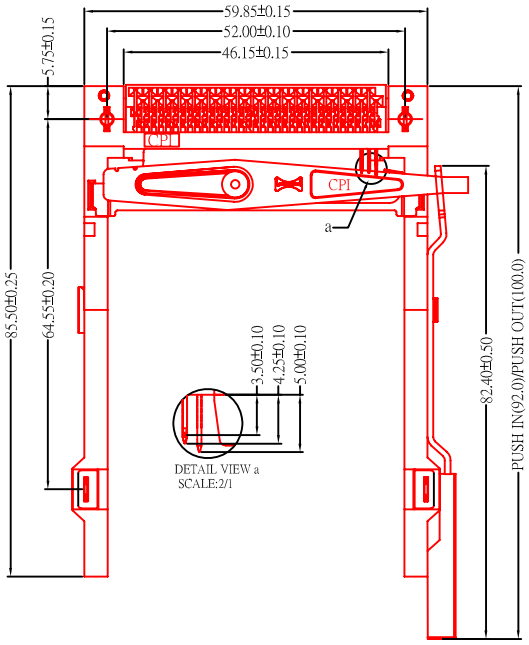
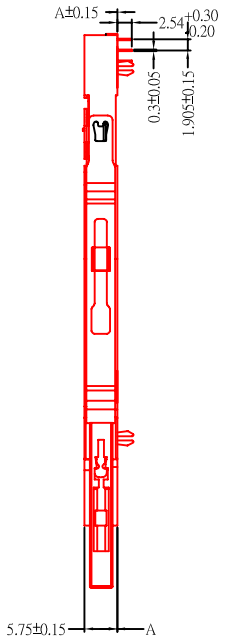
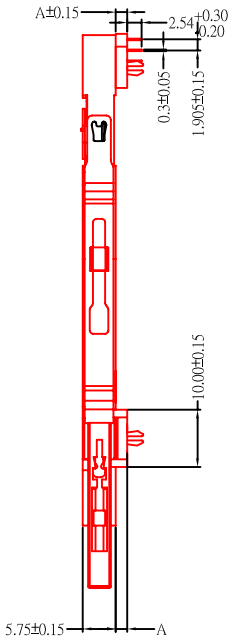
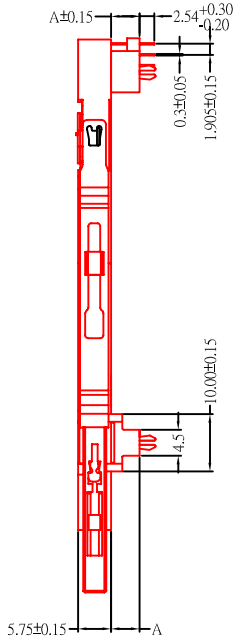


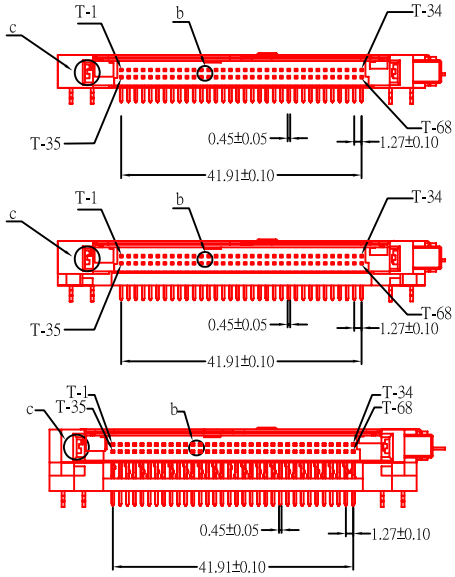




1.PRODUCT NO.: PC-R H 1 D-X X-S 1 E-AXX-C-03
1 2 3 4 5 6 7 8 9 10 11 12 13

SPECIFICATION:
1. PC-PCMCIA;
2. G-WITH GUIDE;C-WITHOUT GUIDE;
   R-RIGHT EJECTION BAR;
   L-LEFT EJECTION BAR;
3. H-PIN CONNECTOR FOR SYSTEM SIDE;
4. 1-SINGLE STACK;2-DOUBLE STACK;
5. D-DIP TYPE;S-SMT STACK;
6. DIMENSION A;
7. PRODUCT CODE:B=1.1MM 0=VOLTAGE 5V
   B=2.2MM V=VOLTAGE 3.3V
8. S----SHORT STEEL EJECTION BAR
9. 1---SHORT LEG(STANDARD),WITHOUT
   LEG-CONNECTING SHIP
10. E---FRONT 2.3MM LATCH ,BACK 2.3MM LATCH
11. GOLD PLATING OF CONTACTS:
    03-G/F 05-5u" 10-10u" 15-15u"
    A-----HALF GOLD TIN.
12. A---NO MARK
    C---CPI MARK
13. 03---THICKNESS OF THE TERRNINAL IS 0.3MM.

2.MATERIAL:
INSULATOR: PBT UL94V-0 BLACK
CONTACTS:COPPER ALLOY,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL.
GUIDE/PUSH BUTTON: PBT,UL94V-0/STAINLESS STEEL

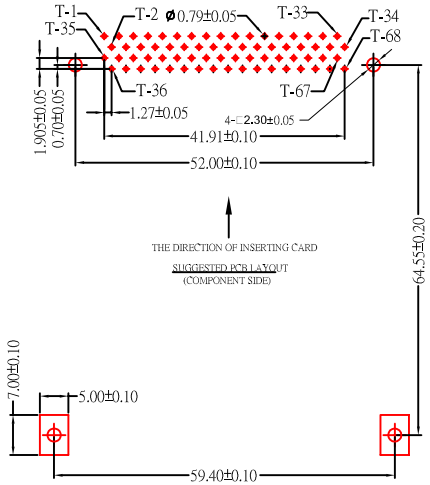3.ELECTRICAL:
CURRENT RATING: 0.5A AC, DC
TEMPERATURE RANGE: -20˚C ~ +60˚C
INSULATION RESISTANCE:1000M Ω MIN.(500V DC)
CONTACT RESISTANCE: 40mΩ MAX.
WITHSTANDING VOLTAGE: 500V AC/MINUTE

| Pin Type | Interface Dim. | Pin No. |
|---|---|---|
| Detect | 3.50 mm | 36, 67 |
| General | 4.25 mm | all other pins |
| Power | 5.00 mm | 1, 17, 34, 35, 51, 68 |

Ordering Information

| A \ B | DIM. B = 1.1 mm (0) Voltage 5V | DIM. B = 2.2 mm (V) Voltage 3.3V |
|---|---|---|
| (0) A = 0.0mm | PC-RH1D-00-S1E-AXX-C-03 | PC-RH1D-0V-S1E-AXX-C-03 |
| (E) A = 2.0mm | PC-RH1D-E0-S1E-AXX-C-03 | PC-RH1D-EV-S1E-AXX-C-03 |
| (G) A = 2.2mm | PC-RH1D-G0-S1E-AXX-C-03 | PC-RH1D-GV-S1E-AXX-C-03 |
| (J) A = 5.0mm | PC-RH1D-J0-S1E-AXX-C-03 | PC-RH1D-JV-S1E-AXX-C-03 |
| (S) A = 5.5mm | PC-RH1D-S0-S1E-AXX-C-03 | PC-RH1D-SV-S1E-AXX-C-03 |
| (P) A = 8.0mm | PC-RH1D-P0-S1E-AXX-C-03 | PC-RH1D-PV-S1E-AXX-C-03 |
| (R) A = 10.0mm | PC-RH1D-R0-S1E-AXX-C-03 | PC-RH1D-RV-S1E-AXX-C-03 |

| REVISION | DATE | DESCRIPTION | MATERIAL | DRAWN BY | DESIGNED BY | SCALE |
|---|---|---|---|---|---|---|
| A | 2012/05/25 | 新版發行 陳月師 | | DCL | | 1/1 |
| B | 2013/05/19 | 新增垫高2.2規格及修改图面 李智杰 | FINISH | CHECKED BY | APPROVED BY | DATE 2012/05/25 |

GENERAL TOLERANCE

Wellco T&C Co., Ltd.

NAME
PC68公座單層右短鐵推杆
墊高XXX卡槽2.2/1.1
前后2.3魚叉孔標准支架無
支架固定鋼片成品

DRAWIND NO.
PC-RH1D-XX-S1E-A03-C-03